FROZEN SNOW



Self-contained ice maker up to 104 kg - Granular system

Position n°

7453.0020

Application fields



• Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) aircooled vers.
- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet
- Undercounter model

• Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 10° C | 104 |
| 21° C | 15° C | 95 |
| 32° C | 21° C | 81 |


7453.0020



FROZEN SNOW



Self-contained ice maker up to 104 kg - Granular system

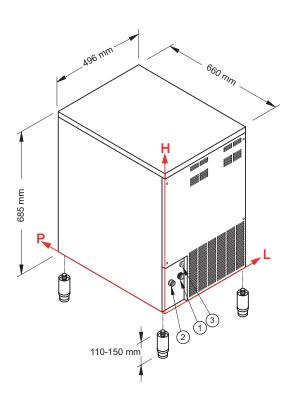

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1 Water inlet: 105 mm - 135 mm - 3/4"
- ② Water outlet: 55 mm - 140 mm - 24 mm
- ③ Electrical connection: 115 mm - 220 mm

Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |


• Technical information

| Production in 24h | 95 kg |
|--------------------------|--|
| Store capacity, up to | 19 kg |
| Cooling system | A - W |
| Refrigerant | R404A |
| Standard voltage | 220-240 V ~ 50 Hz |
| Electrical consumption | 550 W |
| Fuse | 10 A |
| Water consumption | A: 1 l/kg |
| | W: 6,3 l/kg |
| Sizes (L-P-H mm) | 496 - 660 - 685 |
| Sizes with pack (L-P-H n | nm) 550 - 720 - 880 |
| Net weight | 59 kg |
| Gross weight | 67 kg |
| Finish | AISI 304 stainless steel, scotch brite |
| | |

All the technical information must be considered at the following conditions:

Ambient

+21° C





temperature

. +15° C

Electrical consumption at +43° C (standard voltage)

0 0

Models and specifications are subject to change without notice Rev. 00 - Issued January 2017